

## Theoretical Design and Mass Modeling of a Single Spool Micro Turbojet Engine suitable for Drone and UAV Propulsion

Swati Chauhan

Department of Aerospace Engineering, Karunya Institute of Technology and Sciences,  
Coimbatore – 641 114, Tamilnadu, India  
swatichauhan@karunya.edu.in

G. Jims John Wessley\*

Department of Aerospace Engineering, Karunya Institute of Technology and Sciences,  
Coimbatore – 641 114, Tamilnadu, India  
jims\_john@karunya.edu

**Abstract**—This paper presents the design of major components of a turbojet engine that can produce thrust in the range of 4 kN suitable for MALE UAV and similar drone propulsion. The paper covers the design of engine inlet, compressor impeller, compressor diffuser, turbine with CH10 airfoil blades, combustion chamber and its zones as well as the exit nozzle of the turbojet engine. It is found that the engine inlet is 420 mm, while the compressor has a diameter of 250 mm with the turbine fixed with 19 vanes, combustion chamber of length 259 mm and radius 52 mm and a nozzle exit radius of 125 mm. Also, the paper presents the matching of turbine and compressor in terms of rotational speed, mass flow rate and torque produced. The paper also covers the detailed estimation of mass of individual components and the total mass of the engine is estimated to be 46.61 kg. The thrust developed by the engine is found to be 4.4 kN at a rotational speed of 16,540 rpm, which is well above the expected output.

### I. INTRODUCTION

There has been a growing need in the past few decades to develop portable power plants for small UAVs and drones in the medium and high altitude range. This lack of appropriate propulsion system has motivated researchers across the globe to research on micro gas turbine engines as a feasible alternative to the currently used piston engines. The performances of piston engines are affected by altitude as there is a significant drop in the power output and increase in the specific fuel consumption with altitude. The use of single spool micro turbojet engines to power UAVs has attracted enormous attention due to its simplicity in construction, lower production, operation and maintenance costs. The efficiency of existing turbine engines needs to be increased to acceptable levels as the performance of these engines are hampered by small size, low pressure ratios, low Reynolds number and high rotational speeds. A detailed study on the design and analysis of individual components of turbine

engines will pave way to better understanding and development of future turbine engines that can propel UAVs and drones. This paper provides detailed design of the major components of a single spool turbojet engine and the mass modelling of the designed engine to estimate its weight. The outcomes of this paper will enable designers to design and manufacture components at a faster rate leading to the elimination of the present disadvantages and effective utilization of this engine to propel drones and UAVs in the near future

### II. LITERATURE BACKGROUND

The availability of detailed design procedure for major components of turbojet engine from the reported literatures is very minimal. There is limited amount of literature available on the design and modelling of individual components of turbojet engine in the published literature. A few of the related findings is summarized as below.

Tarek Nada (2014) investigated different configurations of gas turbine engines and developed full numerical model for the engine. A comparison between single-spool and two-spool engine is made with free power turbine. The result shows that effect of turbine cooling flow is highly nonlinear and causes significant change in net work. If cooling is ignored and considering Turbine Inlet Temperature (TIT) of 1600K and pressure ratio 60, the overall work and efficiency are estimated to be 20% and 5% respectively. It is also seen that, to get maximum efficiency, the reheat combustor has to be placed at nearly 10%-20% of the expansion section<sup>[1]</sup>. Satish Peruri. et.al (2015) designed a micro gas turbine and performed the analysis on its turbine and compressor to find out the maximum stress and to estimate the total deformation. Using Titanium Alloy for turbine and compressor, the CFD analysis shows that the compressive yield strength and tensile yield strength is 930 MPa and 1070 MPa<sup>[2]</sup>. Jassim et. al (2015) carried out the design, fabrication and testing of a turbine jet engine derived from an automobile turbocharger and a newly designed

\*Corresponding Author

combustion chamber. It is seen that the equivalence ratio impacts the speed of the engines, the flame length and the impact of the engine. Further, the design of combustion chamber with proper mixing of primary and secondary air with reactants increases the temperature of the burning mixture and increases the speed of the engine<sup>[3]</sup>.

V. Raviteja. et.al (2015) designed and fabricated a micro jet engine that can be used for future helicopter and hover boards. The results show that engine produces 60-70N thrust at 50,000 to 70,000 rpm. To minimize the weight of the engine single fuel pump lubrication is used. It is seen that, when the compressor and turbine diameter is increased, the thrust produced by the engine is also increased. The fabricated engine is found to cost less when compared to similar other engines<sup>[4]</sup>. D. Klein et.al (2015) modelled a Turbojet Gas turbine engine theoretically and computationally to study the performance of the engine at different operating conditions. From the results it is observed that, the error between the simulation and calculated performance is within 2% and confirms the efficacy of the models<sup>[5]</sup>. Mohamed Khalil et.al (2016) conducted the theoretical and experimental analysis on micro jet engine's performance using energy and momentum equations. To predict the maps of the compressor and combustion chamber empirical equations were used. The results of the analytical analysis show that the thermodynamic cycle analysis using empirical formula is suitable for preliminary analysis of the performance of the MGT engine compressor and combustion chamber. Commercial software "GasTurb" was used for comparison of theoretical results<sup>[6]</sup>. Bela et. al (2016) conducted a thermal mathematical modelling of turbo shaft engines and concluded that, it is not only essential to have high compressor pressure ratio and turbine inlet temperature to obtain high overall efficiencies, but also to have the polytropic efficiency of the compressor as high as possible to achieve it. The thermal modelling gives an idea of thermal efficiencies and shaft work net output of turbo shaft engines for various compressor pressure ratios and turbine inlet temperatures<sup>[7]</sup>.

Priyant Mark et.al (2016) designed an Annular Combustion Chamber for low bypass turbofan engine using Siemens NX 8.0, and the aerodynamics flow characteristics is simulated numerically by means of Ansys 14.5 software unit. The various dimensions of the combustor are calculated based on different empirical formulas. The result shows that SFC was reduced by regulating the temperature and the efficiency and pressure loss was achieved by a thin margin. It also shows that combustor chamber is shorter than other combustors<sup>[8]</sup>. Bhagawat Yedla et.al (2016) designed a micro gas turbine blade in solidworks based on CH10 airfoil and analysed using modified angles. CFD analysis carried out using ANSYS ICEM CFX concludes an error of 0.737% due to turbulence and shock losses suffered by the blade<sup>[9]</sup>. Prabjot Singh Viridi et.al (2017) designed the major components of a Turbojet Engine using CATIA and ANSYS software and fabricated the same. The impeller of the compressor was designed for producing 2.9 bar pressure at

8000rpm, and combustion chamber outer liner diameter and inner diameter was set to 320 mm and 240 mm while the overall length of combustion chamber was 284 mm<sup>[10]</sup>. Michal Czarnecki (2013) carried out the mass modelling of a micro gas turbine single spool turbojet in well-known Scheckling design layout (IR/IA). Weight of structures calculated on the basis of numerical model was 1.371 kg which represents 98% of the real structure. The largest percentage share in micro gas turbine design elements is sheet metal structures (outer casing and combustion chamber)<sup>[11]</sup>.

### III. DESIGN OF TURBOJET ENGINE COMPONENTS

In a turbojet engine, air is taken in through an opening in the front of the engine which is compressed to 3 to 12 times its original pressure in the compressor. Fuel is added to the air and burnt in the combustion chamber to raise the temperature of the fluid mixture to about 1,100 F to 1,300 F. The resulting hot air is passed through a turbine, which drives the compressor and the exhaust gasses passes through a nozzle outlet where thrust is produced because of the reactive forces of the exit stream. The main components of a

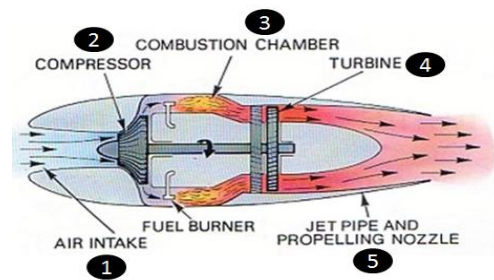


Fig. 1. Main components of a Turbojet Engine  
turbojet engine are shown in Fig 1.

#### A. Design Cycle Estimation

The cycle calculations are the basis for designing the different stages of the turbojet engine. Here the input condition is based on desired thrust and ambient temperature

TABLE I  
INITIAL INPUT TO THE THEORETICAL DESIGN

Parameter	Initial Condition
Thrust required	4 kN
Pressure Ratio	2
Inlet Temperature	288 K
Initial Pressure	1.01 Bar
Max Turbine Inlet Temperature	1100 K
Compressor Efficiency	0.85
Turbine Efficiency	0.94
Mechanical Efficiency	0.99
Nozzle Efficiency	0.95
Combustion Efficiency	0.98

of similar systems. The initial values of input parameters considered in the analysis is given in Table 1.

The work done by the compressor and turbine can be calculated, with the inlet and outlet temperature for the compressor as below.

$$\frac{W_{comp}}{m} = C_{pa}(T_{02} - T_{01}) = 1.005 * 72.5 = 72.86 \text{ kW}$$

$$\frac{W_t}{m} = \frac{W_{comp}/m}{\eta_m} = 73.59 \text{ KW}$$

Based on this, the turbine inlet and outlet parameters are estimated to be and  $P_{03}=1.939\text{bar}$  (Turbine Inlet),  $T_{04} = 1035.898\text{K}$  (Turbine outlet temp) and  $P_{04} = 1.53 \text{ bar}$

*B. Design of Engine inlet*

A bell mouth inlet is selected as it offers practically no air resistance. The duct loss is so small that is considered zero.

Inlet diameter =  $2 * D = 42 \text{ cm}$   
 Inlet width =  $\frac{3}{4} * D = 15.75 \text{ cm}$

The bell mouth inlet of the turbojet engine is shown in Fig 2.

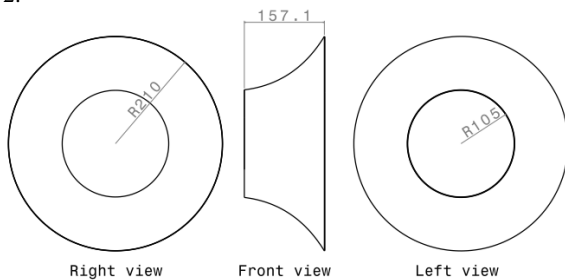


Fig 2. Bell Mouth inlet of the Turbojet engine

*C. Design of Compressor Impeller Wheel*

The key component that makes a compressor centrifugal is the centrifugal impeller. Centrifugal impeller is used primarily for their suitability in handling small volume flows, but other advantages include a shorter length than an equivalent axial compressor and better resistance to Foreign Object Damage (FOD). The input parameters are assumed as: Power input factor ( $\varphi$ ) = 1.04, Slip factor ( $\sigma$ ) = 0.9, Rotational speed (N) = 16540 rpm = 275.66 rps, Overall diameter (D) = 0.25m, Eye tip diameter = 0.22m, Eye root diameter = 0.02m, Air mass flow (m) = 7.6 kg/s.

The impeller tip speed can be found out by:

$$U = \pi * D * N = 216.508 \text{ m/s}$$

$$\text{Power} = m * C_p * (T_{03} - T_{01}) = 6125.676 \text{ KW}$$

Peripheral speed at the impeller eye tip radius

$$\text{At tip} = \pi * 0.22 * 275.66 = 190.52 \text{ m/s}$$

$$\text{At root} = \pi * 0.020 * 275.66 = 17.32 \text{ m/s}$$

The angle is estimated as

$$\text{At root} = \tan^{-1} \frac{17.32}{190.52} = 5.13^\circ$$

$$\text{At tip} = \tan^{-1} \frac{17.32}{190.52} = 5.13^\circ$$

Now,

$$\frac{P_2}{P_{02}} = \left(\frac{T_2}{T_{02}}\right)^{\frac{\gamma}{\gamma-1}}, \text{ and } T_{02} = 43.65 + 298 = 341.65 \text{ K}$$

$$T_2 = T_{02} - \frac{C_2^2}{2 * C_p} = (341.65 - 24.76) \text{ K} = 316.89 \text{ K}$$

$$\rho_2 = \frac{P_2}{R * T_2} = 1.286 \text{ kg/m}^3$$

The required area of cross section of flow in the radial direction at the impeller tip is:

$$A = \frac{m}{\rho_2 * C_{r2}} = 0.0356 \text{ m}^2$$

Hence the depth of impeller channel is found to be

$$\text{Depth of impeller} = \frac{A}{\pi * D} = \frac{0.0356}{\pi * 0.25} = 0.0453 \text{ m}$$

The dimensions of the designed impeller are shown in Fig 3.

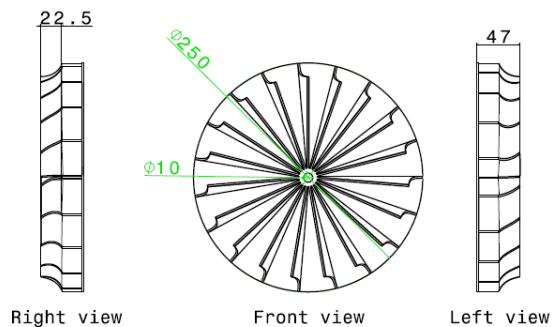


Fig 3. Dimensions of centrifugal impeller

*D. Design of Compressor Diffuser*

The diffuser manifold is responsible for the conversion of kinetic energy of motion into static pressure energy. The total compression is shared between the rotor and the diffuser, but the diffuser does not perform work on the air.

The initial assumptions are: Radial width of vaneless space = 0.04m, Depth of diffuser passage = 0.045m, Number of

vanes = 19 and Approx. mean radius of diffuser throat = 0.15 m.

Radius of diffuser vane leading edge ( $r_2$ ) = over all radius + radius width = 0.165m

The surface area =  $2 \cdot \pi \cdot r_2 \cdot \text{depth of diffuser} = 0.04665 \text{ m}^2$

Area of cross action of flow is radial direction =  $2 \cdot \pi \cdot 0.165 \cdot 0.0453 = 0.0469 \text{ m}^2$

$$\theta = \tan^{-1} \left( \frac{122.20}{164.021} \right) = 36.68^\circ$$

As first approximation, we may neglect the thickness of diffuser vanes, so that the area of flow in the radial direction

$$\text{Area} = 2 \cdot \pi \cdot 0.15 \cdot 0.045 = 0.0424 \text{ m}^2$$

$$\text{Direction of flow} = \tan^{-1} (136.30/180) = 37.13^\circ$$

Total area of throat passage is  $0.0424 \cdot \sin(37.13) = 0.0255 \text{ m}^2$ . With 19 diffuser vanes the width of the throat in each passage of depth is therefore = 0.02m.

The overall dimensions of the compressor diffuser are shown in Fig 4.

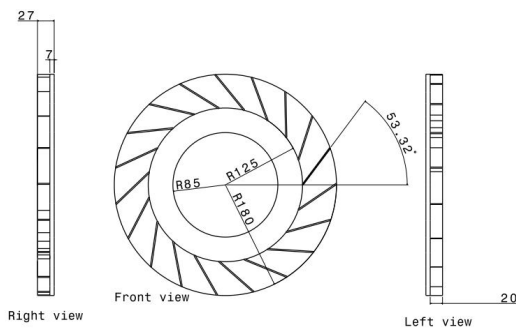


Fig 4. Specifications of compressor diffuser

**E. Turbine Design Estimations**

The combustion gas flows first into turbine nozzle guide vane system, accelerating the gases in the direction of rotation of rotor followed by gas expansion. This increases the speed rapidly and at the same time flow strikes the turbine blades. Axial turbine which is chosen for the design in this paper is found to be more efficient.

Assuming, Mass flow ( $m$ ) = 7.6 kg/s, Isentropic efficiency  $\eta_i = 0.9$ , Inlet temperature  $T_{01} = 1100\text{K}$ , Temperature drop  $T_{01} - T_{03} = 43.66\text{K}$ , Pressure ratio  $P_{01}/P_{03} = 2.4455$ , Inlet pressure  $P_{01} = 2\text{bar}$ , Rotational speed ( $N$ ) = 275.66 rev/s and Mean blade speed  $U = 216.508 \text{ m/s}$ , the dimensions of the turbine are estimated to be as below:

$$\text{Power input } (\psi) = \frac{2C_p \Delta T_{03}}{U^2} = \frac{2 \cdot 1.148 \cdot 43.65 \cdot 10^3}{(216.508)^2} = 2.138$$

When three dimensional effects are included, the reaction will increase from root to tip of the blades and a degree of reaction of 0.84 at the mean diameter might mean too low a value at the root.

The angles as estimated are shown in the velocity triangle in Fig 5.

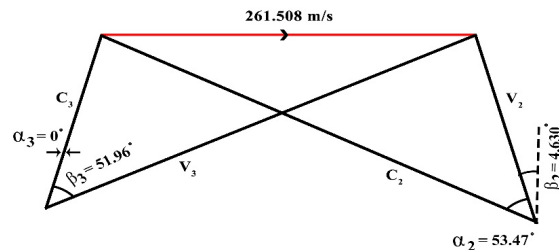


Fig. 5. Velocity Triangle of flow in Turbine

From geometry of the velocity diagram

$$C_{a2} = U\Phi = 261.508 \cdot 0.8 = 209.20 \text{ m/s}$$

$$C_2 = \frac{C_{a2}}{\cos \alpha_2} = 351.478 \text{ m/s}$$

The temperature equivalent of outlet velocity

$$T_{02} - T_2 = \frac{C_2^2}{2C_p} = \frac{(351.478)^2}{2 \cdot 1148} = 53.8052 \text{ K}$$

Annulus area at plane 2 is

$$A_2 = \frac{m}{\rho_2 \cdot C_{a2}} = 0.0709 \text{ m}^2$$

Throat area of nozzle required is

$$A_{2N} = \frac{m}{\rho_2 \cdot C_2} \text{ or } A_2 \cos \alpha_2 = 0.0709 \cdot 0.5952 = 0.0421 \text{ m}^2$$

$$A_3 = \frac{m}{\rho_3 \cdot C_{a3}} = 0.1424 \text{ m}^2$$

The annulus area is given by

$$A = 2 \cdot \pi \cdot r_m \cdot h = \frac{U_m \cdot h}{N}$$

The height and radius ratio of the annulus can be found from

$$h = \frac{AN}{U_m} = \left( \frac{275.66}{216.508} \right) A$$

The specifications of the turbine designed are shown in Fig 6.

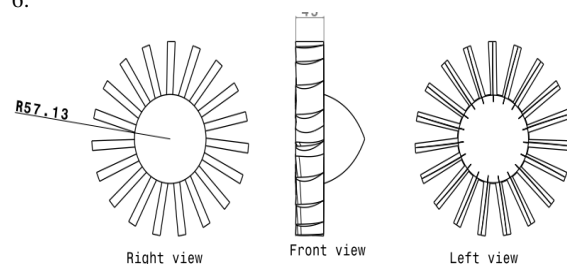


Fig. 6. Specifications of the designed Turbine

F. Combustion Chamber Design

In this project, an annular combustor is chosen as it uses the maximum space available within a specified diameter and associates minimum pressure loss. Combustion must be maintained in a stream of air moving with a high velocity in the region of 30-60m/s.

Casing area is found to be

$$A_{ref} = \left[ \frac{R}{2} \left( \frac{m_3 T_3^{0.5}}{P_3} \right)^2 \frac{\Delta P_{3-4}}{q_{ref}} \left( \frac{\Delta P_{3-4}}{P_3} - 1 \right)^{0.5} \right]$$

$$A_{ref} = 8.3166 * 10^{-3} m^2$$

Liner area

$$A_L = 0.66 * A_{ref} = 5.489 * 10^{-3} m^2$$

Annulus area

$$(A_{an}) = A_{ref} - A_L = 0.0083166 - 0.0054890 = 0.0028276 m^2$$

Casing and liner diameter

$$D_{ref} = A_{ref} = 8.3166 * 10^{-3} m^2 = 0.1029 m$$

$$D_L = A_L = 5.489 * 10^{-3} m^2 = 0.08359 m$$

Liner length

$$L_L = 0.2526 m$$

Primary zone length  $L_{PZ} = \frac{3}{4} D_L$  and  $L_{PZ} = 0.062692 m$

Secondary zone length  $L_{SZ} = \frac{1}{2} D_L$  and  $L_{SZ} = 0.041795 m$

Dilution zone length

$$L_{DZ} = D_L (3.83 - 11.83PF + 13.4PF^2)$$

$$L_{DZ} = 0.1429389 m$$

Swiler diameter  $D_{sw} = 0.02290 m$

Recirculation zone length

$$L_{RZ} = 2 * D_{sw} \text{ and } L_{RZ} = 0.04579 m$$

Recirculation zone angle

$$\theta_{RZ} = \cos^{-1} \left[ \frac{D_L(D_L - 2D_{sw}) - (D_L - 4L_{RZ})\sqrt{D_L^2 - 4D_L D_{sw} + 4D_{sw}^2 - 8D_L L_{RZ} + 16L_{RZ}^2}}{2D_L^2 - 4D_L D_{sw} + 4D_{sw}^2 - 8D_L L_{RZ} + 16L_{RZ}^2} \right]$$

$$\theta_{RZ} = 14.4^\circ$$

Dome length

$$L_{Dom.e} = \frac{D_L - D_{sw}}{2 \tan \theta_{RZ}} \text{ and}$$

$$L_{Dom.e} = 0.03448 m$$

The design of number of holes in the different zones of the combustion chamber is shown in Table 2.

TABLE 2  
DESIGN OF HOLES IN THE COMBUSTION CHAMBER ZONES

Zone	Main Hole		Cooling Hole	
	No. of holes	Hole dia (m)	No. of holes	Hole dia (m)
Primary Zone	40	0.01	600	0.00395
Secondary Zone	20	0.008	480	0.0024
Dilution Zone	20	0.01	600	0.00329

The design parameters of the combustion chamber obtained is shown in Fig. 7.

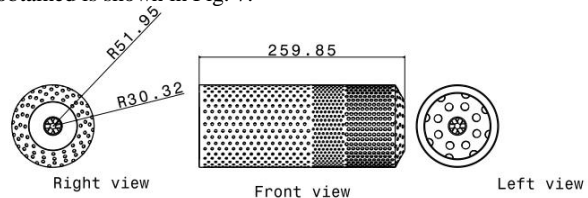


Fig. 7. Specifications of the combustion chamber

G. Thrust Estimation and Sizing of Nozzle Exit

As the flow is assumed to be in subsonic region, a convergent nozzle is chosen in this design where a three dimensional squirting action causes the velocity to increase. However, in this nozzle, velocity cannot exceed the speed of sound.

$$A_t = \frac{m}{P_{04}} \sqrt{\frac{RT_{04}}{\gamma} \left( \frac{\gamma + 1}{2} \right)^{\frac{\gamma + 1}{\gamma - 1}}}$$

$$A_t = 0.039722 m^2$$

Subsequent, the diameter ( $D_i$ ) = 0.22489m, the length of the nozzle ( $L_N$ ) = 0.026 m and the angle = 30° are estimated. The velocity at exit is found to be  $V_{ext} = 582.586 m/s$  and the thrust produced by the engine to be  $F_t = 4.4 KN$ , which is more than the expected value. The dimensions of the nozzle estimated are shown in Fig 8.



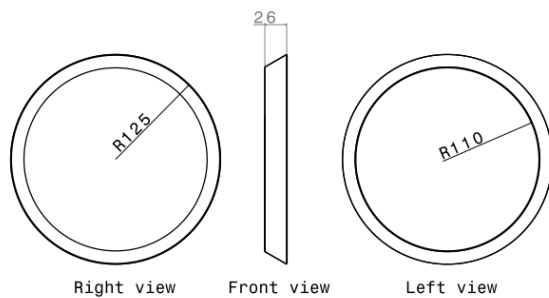


Fig 8. Specifications of Nozzle Exit

H. Design of Shaft

The shaft transmits power from turbine to compressor. Usually circular in cross section, the shaft must have the ability to withstand torque during operation of flight. By determination of External Loads carried by gear shaft and the torque required to transmit power at the speed specified, the diameter of the shaft is estimated to be  $d = 76.01$  mm and the length to be 504 mm.

I. Overall Dimensions of the Turbojet Engine

The overall dimensions of the single spool Turbojet engine intended to produce 4 kN thrust is shown in Fig. 9.

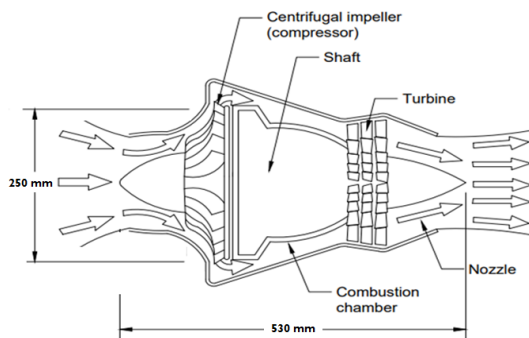


Fig 9. Dimensions of the Engine assembly

IV. MATCHING OF SINGLE SPOOL TURBOJET ENGINE

Matching of components is another important part of designing, as the compressor and turbine are mounted on the same shaft. The work of the compressor and turbine in terms of rotational speed, mass flow rate and torque should match.

Hence, three equations to match are

- a) Rotational speed  $N_T = N_C = 16540$ rpm
- b) Mass flow rate of turbine and compressor (8.090 kg/s)
- c) Torque in compressor and turbine ( 317.5 Nm)

Thus the matching of the compressor and turbine is performed and the design is safe.

V. MASS MODELLING OF THE TURBOJET ENGINE

The general form of the equation describing the weight of the micro gas turbine engine design comes from the sum of n-mass described by structural units (building blocks e.g. compressor, combustor, rotor, turbine, jet-pipe). The material assumed is Carbon/Carbon (C/C) with density to be  $1800 \text{ kg/m}^3$ . The mass of the individual components of the engine and the overall mass of the engine is estimated using standard relations and given in Table 3.

TABLE 3  
ESTIMATION OF MASS OF TURBOJET COMPONENTS

Component	Mass (kg)	Total Mass of the engine (kg)
Compressor	4.359	46.61
Rotor Case	9.0711	
Combustor	11.1438	
Turbine	17.9	
Nozzle	1.32	
External Casing	2.923	

VI. CONCLUSION

The detailed design of the major components of a Turbojet engine is performed and the dimensions of the components are obtained. The matching of the compressor and turbine is done and the design is found to be safe. Also the mass modeling approach is used to estimate the weight of individual components of the engine and hence estimate the total mass of the engine. The knowledge derived from this paper will enable engine designers to quickly design engine components and Turbojet engines in the thrust range of 4 kN that can power Medium and High Altitude drones in the near future.

REFERENCES

- [1] Tarek Nada, "Performance Characterization of Different Configuration of Gas Turbine Engines", Propulsion and Power Research, Vol. 3, pp. 121-132, 2014.
- [2] Satish Peruri, K L N Murty and T. Jayananda Kumar, "Design and Analysis of Micro Gas Turbine", International Journal of Advances in Engineering Research, Vol. No. 10, Issue No. III, September 2015.
- [3] Dr. Jassim M. Abdulkarim Jaff, Mahmood H. Tahir, Yad F. Tahir Shangar S. Sleman, and Hero B. Abdullah, "Contribution in Development of Design and Performance of Turbine Jet Engine", ISOR Journal of Mechanical and Civil Engineering (IOSR-JMCE), Vol. 12, Issue 6 Ver. III, pp. 14-23, Nov.-Dec. 2015.
- [4] V.Raviteja, T. Kashivishwanath, V.Ashok kumar, N.Venugopal, R.Pavan Kumar, "Design and Fabrication of Model Jet Engine (Sivani 150)", International Journal of Modern Engineering Research(IJMER), Vol. 5, Iss. 12, pp-25-33, Dec 2015.
- [5] Dominik Klein and Chamil Abeykoon, "Modelling of a Turbojet Gas Turbine Engine", Internet Technologies and Applications (ITA), Wrexham, pp. 200-206, 2015.

- [6] Aly M. Elzahaby, Mohamed K. Khalil, and Hesham E. Khalil, "Theoretical and Experimental Analysis of a Micro Turbojet Engine's Performance", *International Journal of Scientific & Engineering Research*, Vol. 7, Issue 1, January 2016.
- [7] Bela Varga, and Gyula Ovari Laszlo Kavas, "The Turbine Inlet Temperature and Compressor Pressure Ratio, The Siamese Twins of the Gas Turbine Engines", *Scientific Research and Education in the Air Force- AFASES*, pp. 393-398, 2016.
- [8] C. Priyant Mark and A. Selwyn, "Design and analysis of annular combustion chamber of a low bypass turbofan engine in a jet trainer aircraft", *Propulsion and Power Research*, 5(2), pp-97-107,2016.
- [9] Bhagawat Yedla, Sanchit Nawal and Shreehari Murali, "Turbine Blade Design of a Micro Gas Turbine", *International Journal of Innovations in Engineering and Technology*, Vol. 7, Issue 3, pp. 154-159, October 2016.
- [10] Prabjot Singh Virdi, Mohammed Saahil Khan, Nelroy Pereira, Suresh K.V., and Rolvin S. D'Silva, "Design and Fabrication of Major Components of Turbojet Engine", *Energy and Power*, 7(5), pp-130-135,2017.
- [11] Michal Czarniecki, "Mass Model of Micro Gas Turbine Single Spool Turbojet Engine", *Journal of KONES Powertrain and Transport*, Vol. 20, No. 1, 2013.
- [12] Saeed Farokhi, "Aircraft Propulsion", Second Edition, John Wiley & Sons, Ltd., May 2014, ISBN: 978-1-118-80677-7.
- [13] Irwin E. Treager, "Aircraft Gas Turbine Engine Technology", Third Edition, Tata McGraw-Hill Publishing Company Limited, New Delhi, 2009, ISBN-13:978-0-07-463111-9.
- [14] H.H. Saravanamuttoo, H.Cohen, GFC Rogers, "Gas Turbine Theory", Fifth Edition, Pearson, 2014, ISBN 978-81-7758-902-3.
- [15] Jack D. Mattingly, "Elements of Gas Turbine Propulsion", Indian Edition, Tata McGraw-Hill Publishing Company Limited, New Delhi, 2014, ISBN-13:978-0-07-060628-9.
- [16] Philip G.Hill, Carl Peterson, "Mechanics And Thermodynamics of Propulsion", Second Edition, Addison Wesley Longman, Inc., 1999, ISBN:0-201-52483-X.
- [17] A.S. Rangwala, "Theory and Practice in Gas Turbines", New Age International (P) Limited, 2010, ISBN:978-81-224-2809.
- [18] Gitin M. Maitra, L. V. Prasad, "Handbook of Mechanical Design", Second Edition, Tata McGraw-Hill, 1985, ISBN: 0074517589.

