

HEALTH CARE MONITORING USING WI-FI THROUGH MOBILE DEVICES

Harshita.K¹, Ysaswini.B², Poojitha.M³, Krishna Chaitanya.G⁴

¹KL University, Computer Science and Engineering, India

⁴Assistant Professor, KL University, Computer Science and Engineering, India

¹karanamharshita01@gmail.com

²yasaswini.995@gmail.com

³poojitha.m22@gmail.com

⁴gkc_chaitu@kluniversity.in

Abstract: We have built up an android fundamentally based versatile data procurement (DAQ) arrangement, that gathers redid wellbeing information of the end-client, store examine and picture it on the sensible gadget and alternatively sends it towards to the server farm for extra process. The shrewd cell phone is able to accumulate information from a substantial arrangement of grouped remote (Bluetooth, and Wi-Fi, Cloud, GPRS) and wired (USB) sensors. Implanted sensors of the cell phone offer further accommodating status data, (for example, client area, attractive or abundancy, increasing speed, temperature, and so on.). The UI of our product arrangement is proper for different achieved clients, to a great degree configurable and gives journal common sense to store information (about rest issues, will go about as an eating regimen log, or maybe might be utilized as an agony journal). The product grants connection examination between the differed detecting component data sets. The created framework is tried effectively among our living lab office. Sensor data securing on the individual cell phone allows each end clients and guardians to deliver higher and less difficult wellbeing observing and encourage obstruction. The paper depicts the inside outline of the product arrangement and its principle functionalities.

Keywords: Microcontroller, ECG sensor, cloud, PC, B.P., sensor.

The maturing populace of mechanical nations develops and this increments additionally in addition to other things the medicinal services costs. Straight forwardly installed remote medicinal services can turn into another cost successful worldview, which can tackle numerous issues principally brought together Health Care frameworks have. As of now, there is an expansive number of empowering advances to quantify the patient's physiological flags remotely. With hand-held and portable workstation gadgets utilized as information procurement (DAQ) frameworks we can gather indispensable data about the patients remotely. Due to the distinctive - much of the time restrictive and inconsistent sensor advances; it is an extreme assignment to shape nonspecific, easy to use DAQ frameworks. There are as of now remote patient checking arrangements accessible like the android based for the most part my Fitness Companion, that can bolster the accompanying treatment fields: Fitness, Diabetes, Asthma, Obesity, hypertension, CHD, or the iCare[which gives restorative direction, crisis alert usefulness and gathers individual wellbeing information. other case is the Microsoft Health Vault that backings care of old people (e.g.: neurodegenerative sicknesses, stroke and so on.), also it gives on-line web interface to oversee (process and share) wellbeing data.

2. Hardware System

2.1 Micro controller:

This region shapes the control unit of the entire

1. Introduction

wander. This portion in a general sense contains a Microcontroller with its related equipment like Precious stone with capacitors, Reset equipment, Draw up resistors (if essential) so on. The Microcontroller is the guideline segment of the wander as it handles the devices that are interfaced and talks to them as demonstrated by the program that is created.

2.2 ARM7TDMI:

ARM is the shortening of Cutting edge decreased rule set figuring Machines, it's the name of a class of processors, and is that the name of shape advancement too. The reduced course set preparing rule setting, and related translating framework are essentially less demanding than that of complex Direction Set PC (CISC) arrangements.

2.3 Liquid-crystal display(LCD):

LCD is a level board and visual electronic demonstrate that uses the light control characteristics of liquid pearls. Liquid jewels does not allow transmitting the light straight forwardly. LCDs are mainly to indicate subjective images or settled images which can be shown or covered, as predetermined words, digits, and 7-partition appears like an automated clock. They use a development based on comparison, beside that self-emphatic images which contains a huge number of little pixels, while distinctive exhibits had greater segments.

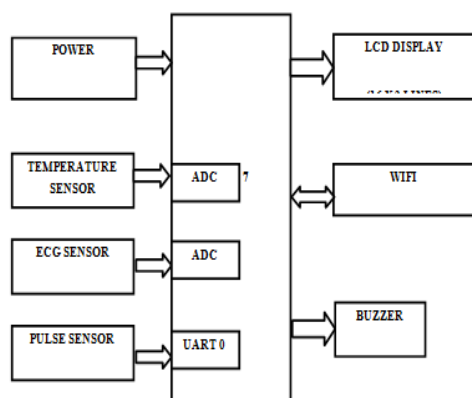


Figure1. Block diagram

In the proposed framework, the temperature sensor and ECG sensor are associated with

microcontroller through switches. The beat sensor gives the systolic, diastolic and Heartbeat readings to the controller. These qualities are shown on the LCD by the microcontroller. On the off chance that the temperature Heartbeat and ECG values surpass their edge values an alarm is given by ringer. the information gathered by controller is put in the versatile application through WIFI. the information set in the cloud can be gotten to anyplace by the specialist and medical attendant.

3. Methodology

3.1 Temperature sensor:

A thermistor semi-conductor gadget is a kind of resistor whose resistance relies on upon temperature. Thermistors are wide utilized as inrush current limiter, temperature sensors (negative temperature coefficient kind regularly), self-resetting over current defenders, and self-acting warming components. The tmp103 might be a computerized yield temperature detecting component in a four-ball wafer chip-scale bundle. The tmp103 has a capacity of perusing temperatures to a determination of 1°C.

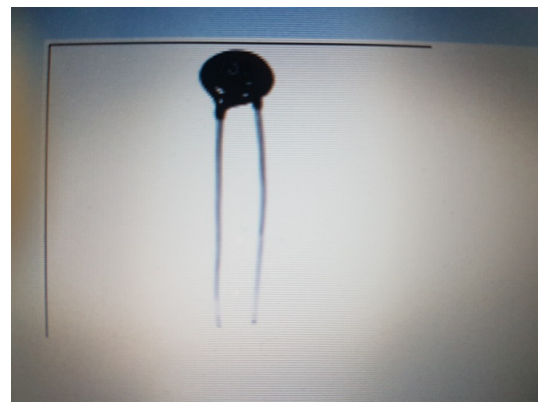


Figure2. Temperature sensor

3.2 ECG Sensor:

The Electrocardiogram (ECG) is a demonstrative gadget that is typically used to evaluate the electrifying and solid components of the heart. The Electrocardiogram (ECG) has turned into a champion among the largest typically used remedial tests even now. Its service is an assurance of a complex of cardiovascular pathologies running from myocardial ischemia and dead tissue to collapse and pulsation have been precious to clinicians for an impressive period of time.

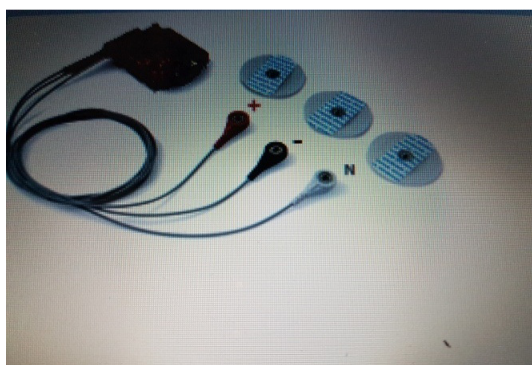


Figure3. ECG Sensor

3.3 Buzzer:

A buzzer is a flagging gadget, normally electronic, which is utilized as a part of vehicles, family unit apparatuses, for example, microwave stoves, and diversion appears. "Buzzer" originates from the grating commotion that signals made when they were electromechanical gadgets, worked from venture down air conditioning line voltage at 50 or 60 cycles. Different sounds normally used to show that a catch has been squeezed or a ring or a beep.

The "Piezo electric buzzers" are familiar with work an inventive run utilizing regular influencing of piezoelectric stoneware creation. These buzzers are accessible in light weight traditionalist sizes from the most diminutive separation crosswise over of 12mm to generous Piezo electric buzzers. Today, piezoelectric buzzers are used as a piece of various courses, for instance, home machines, sound equipment telephones, etc. Additionally, they are associated extensively, for example, in cautions, speakers, telephone ringers, recipients, transmitters, beep sounds, etc.

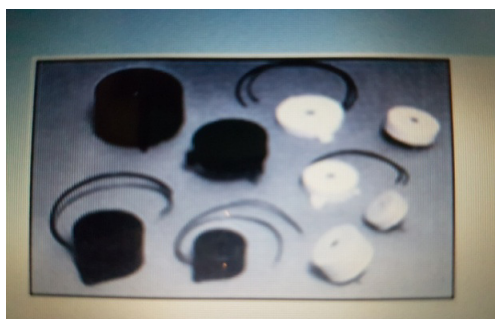


Figure4: Types of Buzzers

3.4 WIFI:

Wi-Fi is the pet name of a remarkable remote structures association progression that utilizes radio waves to pass on remote fast web and system affiliations. A customary misled judgment is that the term Wi-Fi is another way to deal with state "remote endurance," nonetheless this is a great part of the time, no more the condition. Wi-Fi is alone a prohibitive definition which recommends IEEE 802.11x. Wi-Fi works without a physical wired relationship among server and receiver by utilizing radio rehash improvement, a rehash inside the electromagnetic range related to radio discharge spread. Once the RF current was given to a tolerant wire, an electromagnetic field is framed which can incite over space.

The understructure of any remote structure is a find the opportunity to point (AP). The fundamental control of a get the chance to reason behind existing is to pass on a remote standard that PCs will see and "tune" into interface and find the opportunity to point and be a bit of a remote systems, personal computers and gadgets ought to be furnished with remote system links. Wi-Fi is kept up with two or three uses and contraptions including PC delight solaces, home structures, PDAs, cell phones, major in operation structures, and decision sorts of purchaser gear. Any things that were endeavored and bore will give testimony to as "Wi-Fi Confirmed" (an enlisted symbol) by the Wi-Fi Union square measure guaranteed as supportive with one another, paying some regard to the probability that they're from incredibly astonishing makers. for instance, a client with a Wi-Fi Guaranteed thing will utilize any sign to find the opportunity to connect with any other brand of customer equipment that in addition is} moreover "Wi-Fi Ensured". stock that passes this accreditation are depended upon to hold a seal on their bundling that states "Wi-Fi Ensured" and demonstrates the radio rehash band was utilized (2.5GHz for 802.11b, 802.11g, or 802.11n, and 5GHz for 802.11a).

VSD03 is the latest third-time installed Universal Asynchronous Receiver/Transmitter - WIFI factors thought about by VSD TECH. Universal Asynchronous Receiver/Transmitter - WIFI was a presented factor in light of the Universal Asynchronous Receiver/Transmitter serial, agreeing with the WIFI remote Wireless Local Area Network gages, It agrees with IEEE802.11 convention stack and Transmission Control Protocol/Internet Protocol convention stack

which draws in the information change in between the client serial and the remote system factor. Through the Universal Asynchronous Receiver/Transmitter -WIFI module, the standard serial gadgets can point of fact access to the remote system. VSD03 does an exhaustive apparatus and programming overhauls in context of the things. Its rule highlights include:

Interface:

- 2*4 pins of Interface: HDR254M-2X4
- The degree of Baud rate is: 1200~115200bps
- RTS/CTS Equipment stream management
- Single 3.3V power provision

Remote:

- Aid IEEE802.11b/g remote guidelines.
- Assist the degree of rehash:
- 2.412~2.484 GHz
- Aids two sorts of remote systems:
- Ad hoc and Framework
- Aids diverse security affirmation.

Instruments:

- WEP64/WEP128/TKIP/CCMP(AES)
- WEP/WPA-PSK/WPA2-PSK
- Support brisk structures association.
- Support remote.

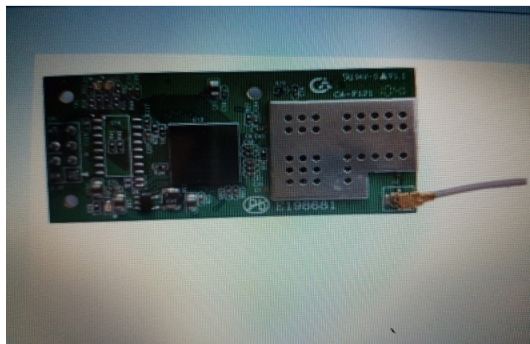


Figure5. WIFI Module

3.5 Pulse sensor:

Append to finger and procure simple out from the sensor upheld heartbeat. We can check the simple yield with microcontroller ADC then plot it or ascertain readings like heart beat every moment. it's anything but difficult to utilize and precise

outcomes.



Figure6: pulse sensor

4. Results

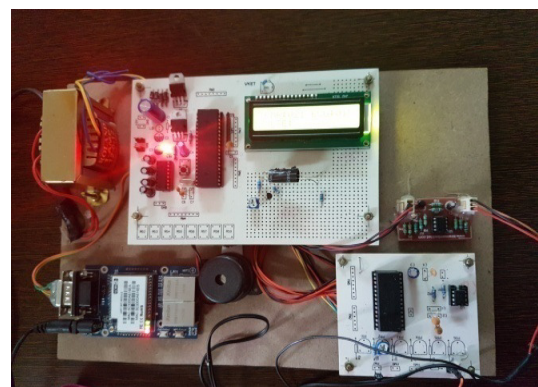


Figure7: Hardware Design Result

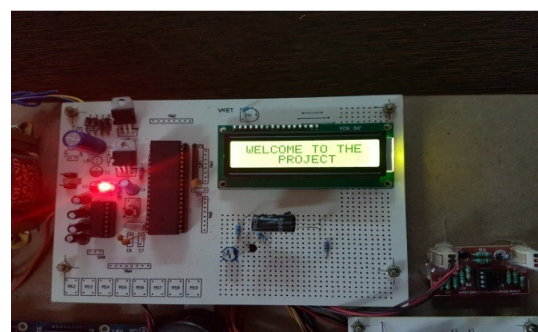


Figure8: Hardware Design Result for switch ON kit

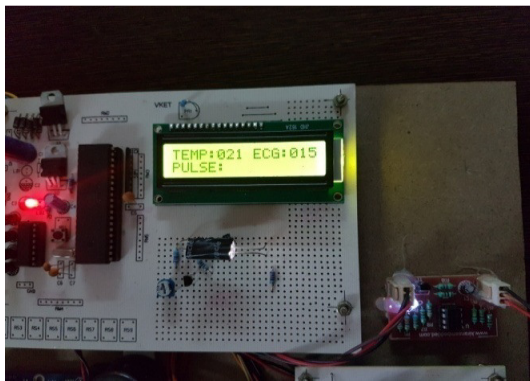


Figure9: Patient Healthcare data Reading

5. Conclusion

This current composed framework gives low unpredictability, low power utilizations and profoundly compact for human services viewing of patient's and it will wipe out the need of usage of costly offices. The specialist will effortlessly get to the patient's information at wherever with the help of android web server.

References

- [1] My Fitness Companion, <http://www.myfitnesscompanion.com/> [Online, acc. 02.02. 2012].
- [2] Ziyu L, Feng, Guowei W, Zhikui Chen, ICare: A Health Monitoring System for the Elderly, Hangzhou, China, December 1820, 2010, arXiv: 1011.3852v1
- [3] Microsoft Health Vault, <http://www.microsoft.com/enus/helthvault/>.
- [4] Prosenis- Innovation for healthier old Age, <http://www.prosenis.hu/>
- [5] Anders W, Linus J, Anders G; Cost of illness and burden of dementia in Europe - Prognosis to 2030, 27 October 2009.
- [6] Dinesh Kumar.P.1 , Madhuvanji.T , Krishna Jayanthi.R , Lavenya.R , Google Balloons, September 2016.
- [7] Intel® Health Guide PHS6000, Product Brief, ftp://download.intel.com/healthcare/pdf/Health_Guide_Brief.pdf
- [8] Galaxy Specification, <http://www.samsung.com/uk/consumer/mobiledevices/smartphones/android/GT-I9000HKDXEU-spec>
- [9] Kozlovzky, Meixner, Windisch, Márton, Network service management and diagnostics solution for a remote patient monitoring system.
- [10] M. Kozlovzky, J. Mesziár, J. Ferenzi, J. Márton, Combined Health Monitoring and Emergency Management, K.S. Nikita et al. (Eds).
- [11] Singh & Mittal. Internet of Things: Challenges in Web Based Remote Patient Monitoring (RPM). Scholars Journal 2706-2709. Doi: 10.21276/sjams.4.7.84(2016).
- [12] Korzun, Internet of Things Meets Mobile Health Systems in Smart Spaces. 111-129. doi:10.1007/978-3-319-49736-5_6
- [13] L, J & R, ECG Web Services for Patient Health Monitoring in Internet of Things. IJCA, 148(6),
- [14] Jeyabalan, Home Healthcare and Remote Patient Monitoring, 675-682. doi:10.1002/9781119173601.ch41.
- [15] Gomez, J. Oviedo & Zuma, Patient Monitoring System Based on IoT. Proceda Computer Science and technology, 83, 90-97. doi:10.1016/j.procs.2016.04.103. 2016.

